

INSURANCE MITIGATION REPORT

Prepared For

OUTLOOK VILLAGE CONDOMINIUM

LOCATION:
6301 58TH STREET NORTH
PINELLAS PARK, FLORIDA 33781



IP Risk Services, Inc.
3559 Fairway Forest Drive, Suite 3559
Palm Harbor, FL 34685
Email: IPRiskServices@aol.com

THIS REPORT FORMAT IS COPYRIGHTED BY IP RISK SERVICES, INC.



IP

TABLE OF CONTENTS

I. MITIGATION REPORT SHEETS

II. CONSTRUCTION DESCRIPTION

III. PHOTOGRAPHS

IV. UPDATE SERVICE

V. LIMITING CONDITIONS

IP

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 11/22/2024		
Owner Information		
Owner Name: Outlook Village Condominium		Contact Person:
Address: 6301 58th Street N. Building 10		Home Phone:
City: Pinellas Park	Zip: 33781	Work Phone:
County: Pinellas		Cell Phone:
Insurance Company:		Policy #:
Year of Home: 1984	# of Stories: 2	Email:

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 through 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1. **Building Code:** Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
 - ☐ A. Built in compliance with the FBC: Year Built _____. For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY) ____/____/_____
 - ☐ B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built _____. For homes built in 1994, 1995, and 1996 provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY) ____/____/_____
 - ☒ C. Unknown or does not meet the requirements of Answer "A" or "B"
2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
☒ 1. Asphalt/Fiberglass Shingle	04/12/2018	BLDC2018002391	2018	☐
☐ 2. Concrete/Clay Tile	____/____/____	_____	_____	☐
☐ 3. Metal	____/____/____	_____	_____	☐
☐ 4. Built Up	____/____/____	_____	_____	☐
☐ 5. Membrane	____/____/____	_____	_____	☐
☐ 6. Other _____	____/____/____	_____	_____	☐

- ☒ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
 - ☐ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
 - ☐ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
 - ☐ D. No roof coverings meet the requirements of Answer "A" or "B".
3. **Roof Deck Attachment:** What is the weakest form of roof deck attachment?
 - ☐ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
 - ☐ B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
 - ☒ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials C. ✓ Property Address 6301 58th Street N. Pinellas Park, FL 33781 Building 10

or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least 182 psf.

- ☐ D. Reinforced Concrete Roof Deck.
- ☐ E. Other: _____
- ☐ F. Unknown or unidentified.
- ☐ G. No attic access.

4. **Roof to Wall Attachment:** What is the **WEAKEST** roof to wall connection? (Do not include attachment of hip/valley jacks within 5 feet of the inside or outside corner of the roof in determination of WEAKEST type)

- ☐ A. Toe Nails
 - ☐ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
 - ☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D

Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are:

- ☒ Secured to truss/rafter with a minimum of three (3) nails, **and**
- ☒ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter **and** blocked no more than 1.5" of the truss/rafter, **and** free of visible severe corrosion.
- ☐ B. Clips
 - ☐ Metal connectors that do not wrap over the top of the truss/rafter, **or**
 - ☐ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
- ☒ C. Single Wraps
 - Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
- ☐ D. Double Wraps
 - ☐ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, **or**
 - ☐ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
- ☐ E. Structural Anchor bolts structurally connected or reinforced concrete roof.
- ☐ F. Other: _____
- ☐ G. Unknown or unidentified
- ☐ H. No attic access

5. **Roof Geometry:** What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).

- ☐ A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.
Total length of non-hip features: _____ feet; Total roof system perimeter: _____ feet
- ☐ B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 _____ sq ft; Total roof area _____ sq ft
- ☒ C. Other Roof Any roof that does not qualify as either (A) or (B) above.

6. **Secondary Water Resistance (SWR):** (standard underlayments or hot-mopped felts do not qualify as an SWR)

- ☒ A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.
- ☐ B. No SWR.
- ☐ C. Unknown or undetermined.

Inspectors Initials C Property Address 6301 58th Street N. Pinellas Park, FL 33781 Building 10

***This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.**

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. **(Question left blank)**

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure						
A	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
B	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
C	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
	Other protective coverings that cannot be identified as A, B, or C						
X	No Windborne Debris Protection						

- ☐ **A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only)** All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
- Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
- ☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
- ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
- ☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- ☐ **B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)** All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
- ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)
 - SSTD 12 (Large Missile – 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
- ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
- ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- ☐ **C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007** All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
- ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
- ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
- ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials SC Property Address 6301 58th Street N. Pinellas Park, FL 33781 Building 10

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

- | | | |
|---|--|---|
| <p align="center">MITIGATION INSPECTIONS MUST BE CERTIFIED BY A QUALIFIED INSPECTOR.
 Section 627.711(2), Florida Statutes, provides a listing of individuals who may sign this form.</p> | | |
| Qualified Inspector Name:
<p align="center">Carmine Villano</p> | License Type:
<p align="center">Home Inspector</p> | License or Certificate #:
<p align="center">HI12514</p> |
| Inspection Company:
<p align="center">4 Point Inspection Services, LLC.</p> | | Phone:
<p align="center">727-222-6939</p> |

☒ Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam.

☐ Building code inspector certified under Section 468.607, Florida Statutes.

☐ General, building or residential contractor licensed under Section 489.111, Florida Statutes.

☐ Professional engineer licensed under Section 471.015, Florida Statutes.

☐ Professional architect licensed under Section 481.213, Florida Statutes.

☐ Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.


I, Carmine Villano am a qualified inspector and I personally performed the inspection or (licensed
(print name)
contractors and professional engineers only) I had my employee () perform the inspection
(print name of inspector)
and I agree to be responsible for his/her work.

An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.

An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)

Page 4 of 4



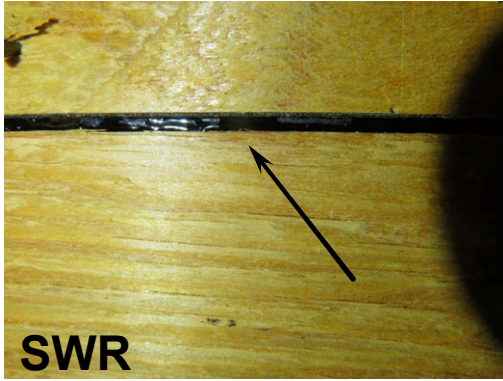

ANNUAL UPDATE SERVICE

**INSURABLE CONSTRUCTION AND LAWS GOVERNING
INSURABLE RESPONSIBILITY CONTINUE TO CHANGE.**

**WE CAN UPDATE THIS INSURANCE REPORT
WITHOUT GOING TO THE ADDITIONAL EXPENSE OF
ANOTHER INSPECTION. THIS SERVICE WILL KEEP
THE ASSOCIATION CURRENT ON ALL CHANGES.**

**WE MAY HAVE TO REINSPECT THE RISK FOR
ANY MAJOR CHANGES TO THE INSURABLE ITEMS.
NORMAL MAINTENANCE WOULD *NOT* REQUIRE
ANOTHER INSPECTION.**

**WE ALSO HAVE AN AUTOMATIC ANNUAL UPDATE
SERVICE. IP WILL UPDATE THE REPORT
AUTOMATICALLY EVERY YEAR WITHOUT ANY
EFFORT FROM THE OWNERS.**



IPRISKSERVICES@AOL.COM

P: (404) 317-7140

IP

Powered by **Core Logic and Underwritten by **Lloyd's of London****



RESERVE STUDIES



**IP RISK SERVICES ALSO OFFERS COMPLETE
RESERVE STUDY REPORTS.**

**WE WERE THE FIRST MAJOR COMPANY TO OFFER
RESERVE STUDY REPORTS FOR CONDOMINIUM
ASSOCIATIONS.**

**MANY HAVE TRIED TO COPY OUR FORMAT BUT OUR
EXPERTISE AND *PIONEER* REPORTS CANNOT BE
DUPLICATED.**

**WE ARE KNOWN TO HAVE THE MOST “USER
FRIENDLY” RESERVE STUDY REPORTS IN THE
INDUSTRY AS WE DO NOT INSERT WORTHLESS
FILLERS SUCH AS GRAPHS AND CHARTS INTO OUR
REPORTS. We just report the FACTS and real COSTS.**

**WE CAN OFFER YOUR ASSOCIATION A SUBSTANTIAL
DISCOUNT BASED ON OUR RECENT APPRAISAL
REPORT. JUST REQUEST YOUR DISCOUNT.**

IPRISKSERVICES@AOL.COM

P: (404) 317-7140

IP

POWERED BY CORE LOGIC AND UNDEWRITTEN BY LLOYD'S OF LONDON



New Building Codes



One of the most overlooked insurance situations in a serious loss involves **new building codes and local ordinances** that may have been updated, changed or even added since the original construction of a building.

A further insurance situation involves **debris removal** after a serious loss. Debris from a loss must be removed before re-construction can begin.

New building codes and debris removal can sometimes be very costly and often overlooked by all parties involved in an insurance loss.

It is in the best interest of the insured to have an **estimate** for these two hazards even if the policy covers this cost.

IP **EXCLUSIVELY** offers a “**Theoretical Value Estimate**” for current building codes and debris removal.

Our 31 years of experience in the Florida market has enabled us to develop an exclusive formula for estimating these two important costs.

Just request us to provide you with this exclusive service.

IP

POWERED BY CORE LOGIC AND UNDERWRITTEN BY LLOYD'S OF LONDON

**IP Risk Services carries complete
Professional Appraisal Liability
Insurance Underwritten thru:**

LLOYD'S

LLOYD'S OF LONDON

**THE ULTIMATE PROTECTION FOR ASSOCIATIONS
AND BOARD MEMBERS**

Our Commitment to Customer Excellence
IP



IP



“EXPERIENCE MAKES A DIFFERENCE”

ALL OF OUR PAST REPORTS HAVE BEEN PRODUCED AND REVIEWED BY A MINIMUM OF AT LEAST ONE OF THE FOLLOWING LICENSED PROFESSIONALS:

- 1. Florida State Certified General Real Estate Appraiser**
- 2. Florida All Lines Insurance Adjuster**
- 3. Florida Licensed General Building Contractor**
- 4. Florida Licensed Insurance Agent**
- 5. Estimating System Licensed thru **Core Logic, Inc.****
- 6. Insurance Underwritten by **Lloyd's of London.****

IP Risk Services has been providing Insurance Services to ALL of Florida for over **32 years strong.**

Our impeccable reputation and acceptance by ALL Insurance Companies and ALL Parties is well known from the Florida Panhandle to the Florida Keys.

Our longevity exhibits our expertise and commitment.



IPRISKSERVICES@AOL.COM

404-317-7140





CoreLogic®

I P Risk Services, Inc.



LIMITING CONDITIONS



This insurance inspection report is based on the data collected on the inspection date. No consideration has been given to material premiums and additional items needed to conform to building codes, ordinances; or demolition in connection with reconstruction or the removal of destroyed risk items. The **value of the land** and site improvements have **not** been included. No responsibility is assumed for legal matters, questions of survey, opinions of title, soil or sub-soil conditions, engineering or other technical matters. **This report is not a Real Estate Appraisal. Insurance report only.**

The conclusions in this report are estimated under **normal market** conditions and is considered appropriate for proper normal insurance coverage. **Natural disasters** may drastically **increase** the cost of construction and is **not** feasible to properly estimate. This report does **not** take into consideration cost increases due to any type of abnormal weather and/or abnormal other conditions.

This insurance inspection report is not a guarantee or warranty of any kind. We do not assume any liability for damages which may result from this report. We are not responsible for conditions this report fails to disclose. The report is valid for one year. This insurance inspection report should be updated at least once a year.

Neither our employment nor our compensation in connection with this report is in anyway contingent upon the conclusions reached; this report sets forth all the assumptions and limiting conditions affecting the analysis, insurable analysis and conclusions contained herein; I P Risk Services, Inc., makes no warranties or representations regarding the insurance report conclusions found in this report.

The authors of this report shall not be required to give testimony or appear in court or at any administrative proceeding relating to this inspection report. Construction replacement cost value can be provided by a variety of professionals and as such is not within the definition of appraisal practice. This opinion is from the ASB.

The Association, by accepting this insurance report, agrees to release IP from any claims, demands or damages. The Association, in consideration of IP performing the insurance analysis report, hereby agrees to indemnify, defend and hold harmless IP Risk Services, Inc., from and against any and all liability, damages, losses, claims, demands or lawsuits arising out of or relating to this insurance analysis report. Acceptance of and use of this report constitutes acceptance of the above statements.

IPRISKSERVICES@AOL.COM

POWERED BY CORE LOGIC AND UNDERWRITTEN BY LLOYD'S OF LONDON